


PRODUCT

# 4001D MAGSIG® NON-INTRUSIVE SIGNALLER //

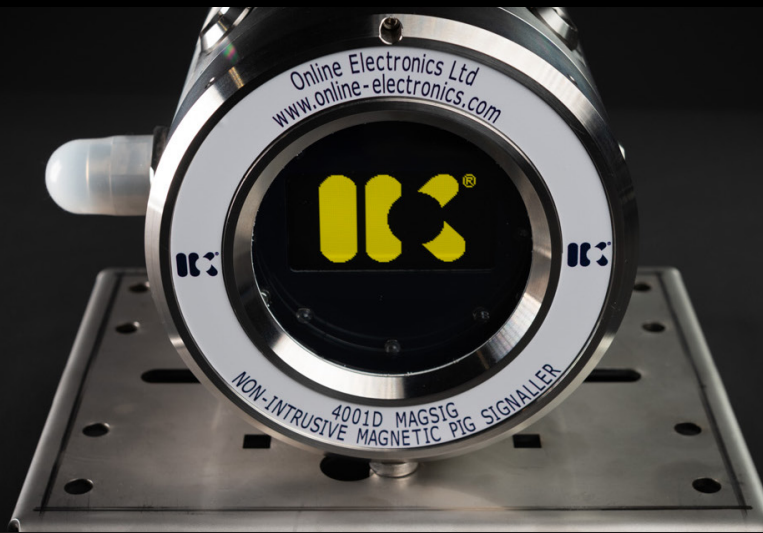

THE ONLINE 4001D MAGSIG® IS A FULLY ATEX AND IECEX CERTIFIED NON-INTRUSIVE PIG SIGNALLER WHICH QUICKLY AND ACCURATELY DETECTS, SIGNALS AND LOGS THE PASSAGE OF MAGNETIC PIGS AT CRITICAL POINTS ALONG A PIPELINE BOTH ONSHORE AND OFFSHORE

Key Benefits:

- Use of the 4001D MAGSIG® can result in time and therefore cost savings.
- Removes any uncertainty over confirmation of pig passage.
- Quick and easy installation using ratchet straps or stainless steel banding.
- Minimal set up required ensuring time is not lost setting up multiple parameters.
- Versatile - can be installed on any pipeline up to 60" diameter with wall thickness up to 50mm, carrying any medium and with pigs running at varying speeds.
- No location restrictions - can be located on major barrel and magnetic sensor can be supplied on a cable up to 10m long for use with buried pipelines or where access is limited.
- Unit can be installed close to receiver door, allowing for confirmation that pig has passed isolation valve and easy pig recovery.

**INNOVATIVE  
KNOW-HOW**

Online Electronics  
T: +44 (0) 1224 714714  
E: oel-sales@ik-worldwide.com

[online-electronics.com](http://online-electronics.com)

## PRODUCT

# 4001D MAGSIG® NON-INTRUSIVE SIGNALLER //



Events are signalled as they occur via a graphical display and high brightness LEDs positioned around the perimeter of the display. The unit logs the time and date of up to 99 events. Logged events can be viewed locally on the display or transmitted remotely over several optional interfaces. The user can the unit ON and OFF as well as modify several settings using the single control button and intuitive menu system.

The detection capabilities vary depending on the background magnetic noise, pig speed, pipeline diameter, wall thickness and the quality of magnets fitted. It is recommended that pigs are fitted with rare earth magnets (neodymium iron boron) to maximise magnetic signal.

### PRODUCT SPECIFICATION//

Battery Type	7x Alkaline DURACELL ID1300 cells
Battery Life (Alkaline)	160 days (LISTENING/LOW POWER MODE at +20°C)
Battery Type	7x Lithium SAFT LS33600 cells
Battery Life (Lithium)	365 days (LISTENING/LOW POWER MODE at +20°C)
External Supply	+21.6VDC to +26.4VDC, <1.0W
Entries (other options available)	4x M20x1.5
Temperature Range (External Supply)	-40°C to +85°C (-40°F to +185°F)
Temperature Range (Alkaline)	-20°C to +54°C (-4°F to +130°F)
Temperature Range (Lithium)	-40°C to +85°C (-40°F to +185°F)
Ingress Protection	IP66
ATEX/IECEX Code	II 1/2 G Ex db ia [ia Ga] IIC T4..T6Gb
EC Type Examination Cert No.	TRAC13ATEX0008X
IECEX Cert No.	IECEX TRC 12.0017X
Weight in Aluminium	5.2kg (11.5lbs)
Weight in 316L Stainless Steel	11kg (24.3lbs)
Length (including mounting plate)	240mm (9.4")
Width (including mounting plate)	192mm (7.6")
Height (including mounting plate)	174mm (6.9")

### STANDARD OUTPUTS//

DPDT Relay (Volt Free Contacts)	2A @ 30VDC/0.5A @125VAC
Current Loop Output	15.mA ± 1.0mA (LISTENING) / 19.0mA ± 1.0mA (DETECTION)



Online Electronics  
T: +44 (0) 1224 714714  
E: oel-sales@ik-worldwide.com

[online-electronics.com](http://online-electronics.com)